

## temperature measurement

### resistance thermometer WTR 460

#### features

- modular resistance thermometer for food industry
- adaptable with welding sleeves M12 (see accessories)
- process connection thread **M12**
- short reaction time without reduced measuring point
- temperature resistance PT100 directly constructed in protective fitting
- electrical connection with M12-plug (connections see accessories)
- optional with programmable measuring transducer (same programm kit like at KMU100), output 4-20mA 2-wire
- specials on request

#### technical specifications


- protective fitting made of stainless steel V4A 1.4404 (316L) resp. V4A 1.4571
- diameter 6 x 1 mm, other diameters on request
- temperature range: -50 °C to +150 °C (extended ranges on request)
- power supply at option measuring transducer 10...35VDC

#### product benefits


With our compact WTR 460 you are able to measure temperatures in the food industry under ideal space utilization. The sensor has a sealing cone below the connection thread, which is aseptically adapted with the help of our welding sleeve (ZEM 050 or KEM 050). You will benefit from the very high quality and durability of the sensor, which is achieved by using high-quality materials. Even in rough industrial environments this sensor can be used without any problems.

#### pin assignment

1 (brown)  
+ voltage  
10...35VDC




M12 plug with PMU



1 (brown)  
2 (white)  
3 (blue)  
4 (black)

M12 plug (only PT100)

#### technical drawing

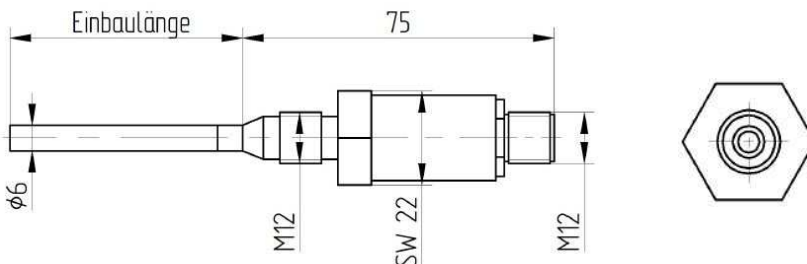

WTR 460-9-...



WTR 460-9-Y-1A-VO-PMU

## temperature measurement

order-code WTR 460...

order example: WTR 460-9-Y-1A-V4-PMU (0-100 °C)

### kind of connection

-9 compact construction, directly with M12 plug, protection class IP69K

### mounting length

-Y 20 mm mounting length  
 -A 50 mm mounting length  
 -B 100 mm mounting length  
 -C 150 mm mounting length  
 -D 200 mm mounting length  
 -E 250 mm mounting length  
 -F 300 mm mounting length  
 -K mounting length on customer's wish (please specify length)

### type of sensor and tolerance

-1A 1xPT100 classe A  
 -KX other types of sensor and tolerance on customer's request

### tapered measuring point

-V0 (without description) without taper  
 -V3 tapered to 3 mm  
 -V4 tapered to 4 mm

### optional

-PMU with programmable measuring transducer (temperature ranges on request an preadjustment please specify)

### accessories

#### welding sleeves

-99-000191 KEM 150, welding sleeve, bullet, for G1/2" sealing system, diameter 35m,  
 hygienic process adaption  
 -99-000193 ZEM 150, welding sleeve, cylinder, for G1/2" sealing system, diameter 30mm,  
 hygienic process adaptation

#### M12-connection wires

-101090 connection cable M12 angled, 4-pole, 5m PVC cable, grey  
 -101087 connection cable M12 straight, 4-pole, 5m PVC cable, grey

**Other lengths available on request.**

**For more accessories, see accessories data sheet.**